



# SL-T3528PTB020-L190 PHOTO TRANSISTOR **DATA SHEET**

 SPEC. NO.
 : SZ19101902

 DATE
 : 2021/11/01

 REV.
 : A/1

Approved By: Checked By: Prepared By:

Part No. | SL-T3528PTB020-L190 **Page** 1 of 9





### LIGHT ELECTRONICS CO., LTD.



#### Absolute Maximum Ratings at Ta=25

Parameter	MAX.	Unit	
Power Dissipation	100	mW	
Collector-Emitter Voltage	30	V	
Emitter-Collector Voltage	5	V	
Moisture Sensitivity Level*1	5a		
Operating Temperature	-40 to +85		
Storage Temperature	-40 to + 100		
IR Reflow Temperature	260 for 10 Seconds MAX.		


#### 1. Storage and operating:

- (1). Storage requirements before vacuum bag opened: Temperature<30 , Humidity<65%RH;
- (2). Check air leakage and vacuum bag damage before opened. If there is any issue found, check the humidity indicator card immediately after bag opened:
  - a. If color changes on "10% circle" of the humidity indicator card only and not the circles of 20% and above, components can be used without additional handling;
  - b. If color changes on both 10% and 20% circles but not the circles of 30% and above, components must be dehumidified according to the conditions of bullet (5);
  - c. If color changes on 10%, 20%, and 30% circle or above, the product should be returned to the supplier for high temperature dehumidification;
- (3). After bag opened, manual soldering or reflow process must follow the following requirements:
  - a. Complete soldering / reflow within 24 hours;
  - b. Requirements of working environment: Temperature<30 , Humidity<60%RH;
- (4). If the working condition is outside (3)a or (3)b requirement, the components must be dehumidified according to the conditions of bullet (5);
- (5). Low temperature dehumidification: temperature 60±5 24 hours;
- (6). Shelf life: 30 days. If it's over 30 days from the production date on the package label, the components must be dehumidified according to the condition of bullet (5). If customer is unable to dehumidify, return components to LIGHT for dehumidification.


#### 2. Caution in ESD:

Static Electricity and surge damages the LED. It is recommend to use a wris2 10.55 T6(s)1.3(70.1(una5.2(et)-244)-246.,5(S


Part No.	SL-T3528PTB020-L190	Page	3 of 9
----------	---------------------	------	--------

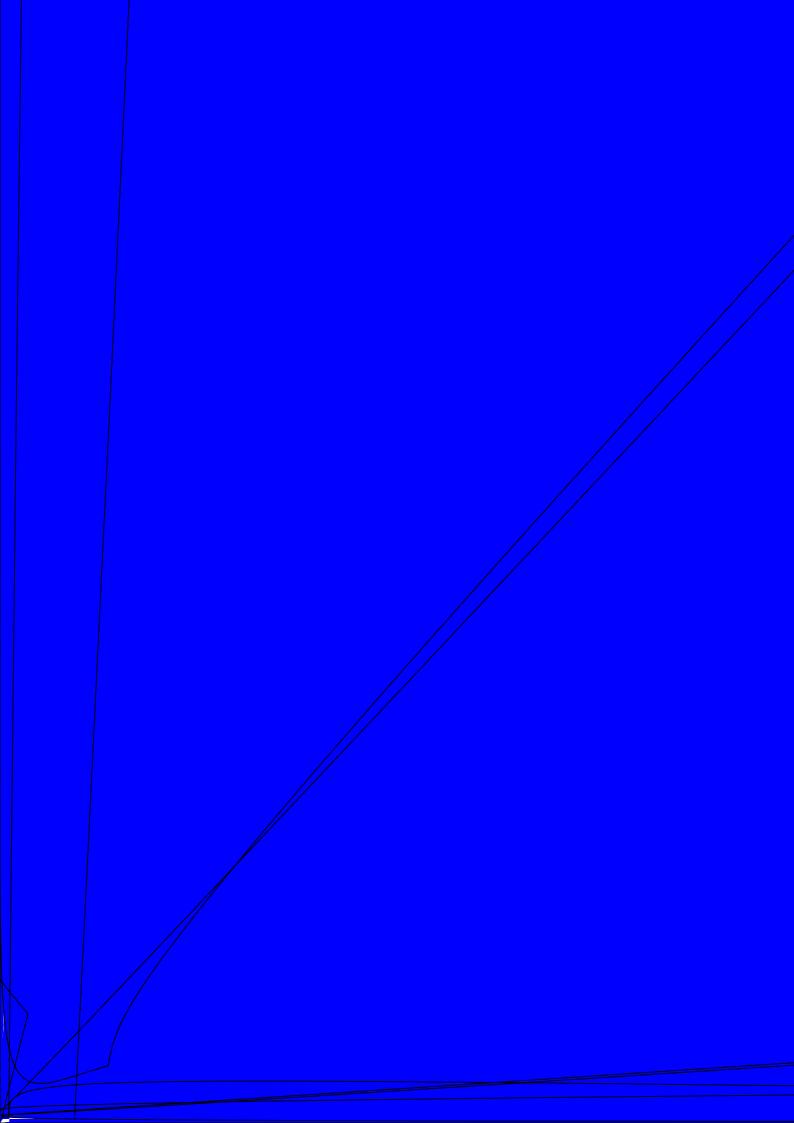

P Page 5 of 9 LG-QR-R009-01

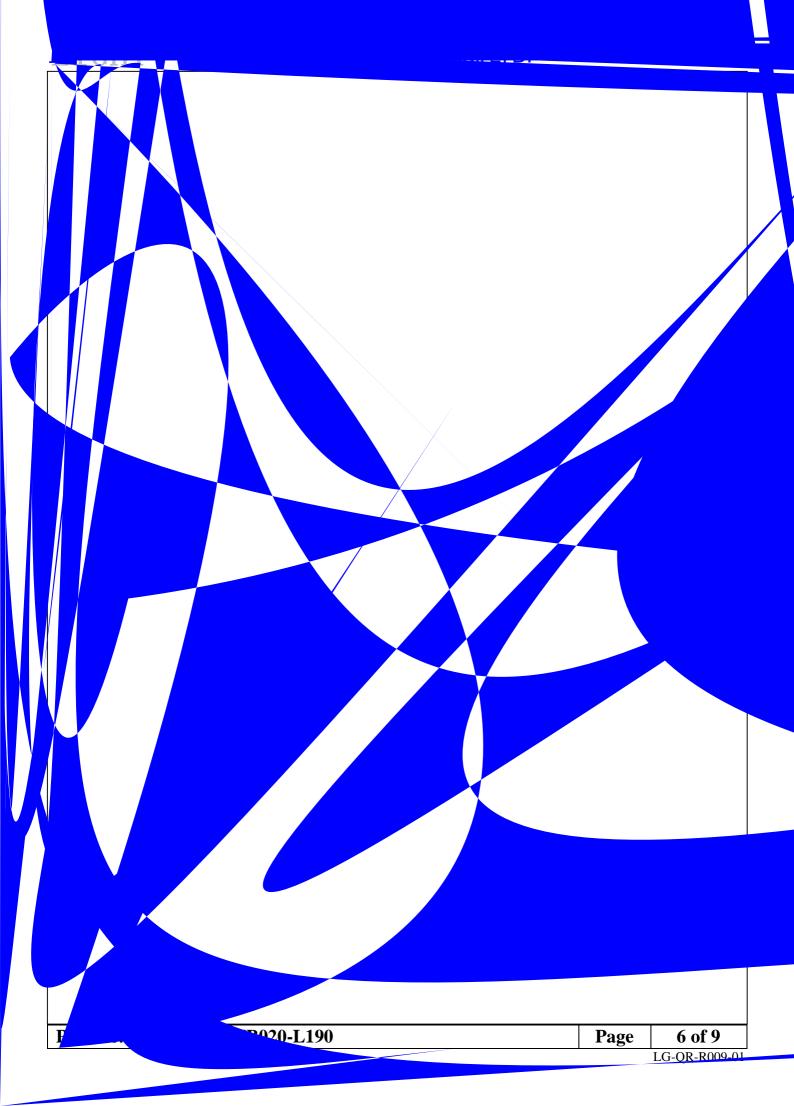





## LIGHT ELECTRONICS CO., LTD.

Part No.   SL-T3528PTB020-L190	Page	8 of 9
		LG-QR-R009-01