

Infrared Photo Diode Specification

Commodity: Infrared Photo diode


Reverse Light Current Bin Limits

BIN CODE	Min.(\AA)	Max.(\AA)
1	26	31
2	31	37
3	37	44
4	44	53

NOTE: The I_L guarantee should be added $\pm 15\%$ tolerance.

Label Explanation


LIGHT Universal Label

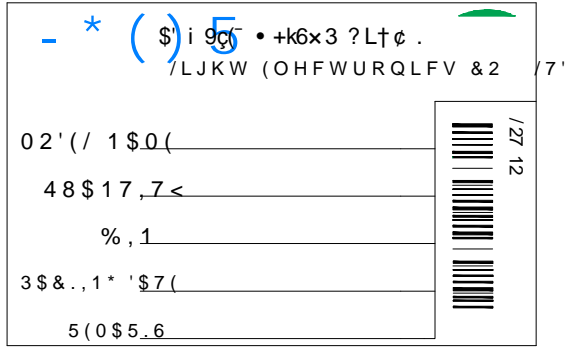

- * (\$) i 9c • +k6×3 ?L†ø .
 /LJKW (OHFWURQLFV & 2 /7'
 02' (/ 1 \$0(
 48\$ 17,7<
 %, 1
 3\$ &., 1* '\$7(
 5(0\$5.6

127 12

Customer Defined Label

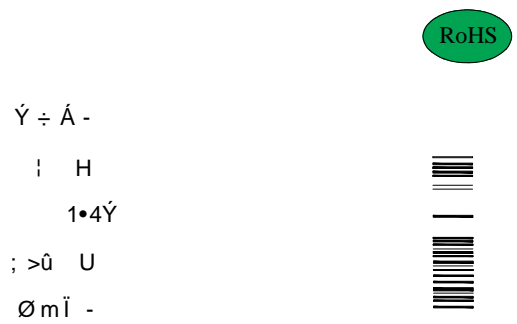

Ÿ ÷ Á -
 i H
 1•4Ÿ
 ; >û U
 Ø mĭ -

RoHS

Carrier Tape Specifications (Loaded Quantity: 2200pcs/reel)

Note: Tolerance unless mentioned is $\pm 0.1\text{mm}$; Unit = mm

Moisture Resistant Packaging

