

SL-T4234IRC150-L340-2PIN DATA SHEET

SPEC. NO. : SZ19121601
DATE : 2019/12/28
REV. : A/1

Approved By:



Checked By:

Prepared By:


Features

- Pb free product—RoHS compliant
- Low power consumption, High efficiency
- Reliable and rugged
- Long life – solid state reliability
- Radiant angle: 20°

Package Dimension




Note:
A: Nick Mark



Part NO.	Chip Material	Lens Color
SL-T4234IRC150-L340-2PIN	AlGaAs/Si	Water Clear

Notes:

- All dimensions are in millimeters.
- Tolerance is $\pm 0.10\text{mm}$ unless otherwise noted
- Specifications are subject to change without notice.





Typical Electrical / Optical Characteristics Curves
(25 Ambient Temperature Unless Otherwise Noted)

Fig.1 Spectral Distribution

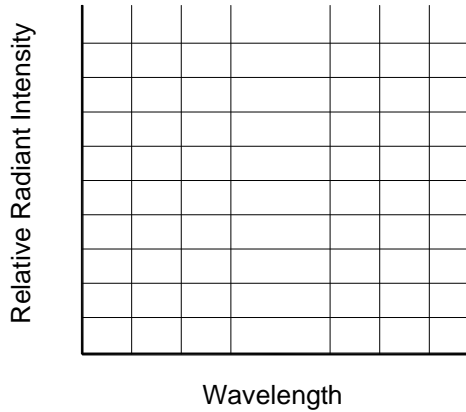


Fig.2 Forward Current Vs Ambient Temperature

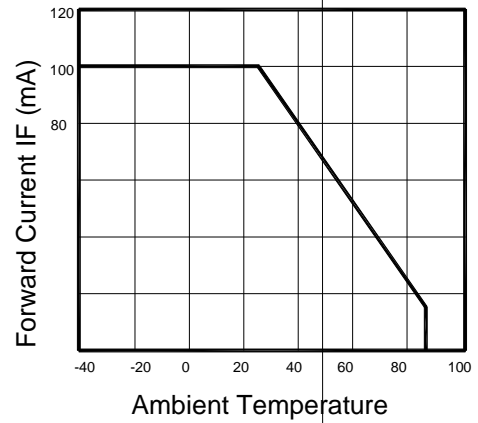


Fig.3 Forward Current Vs Forward Voltage

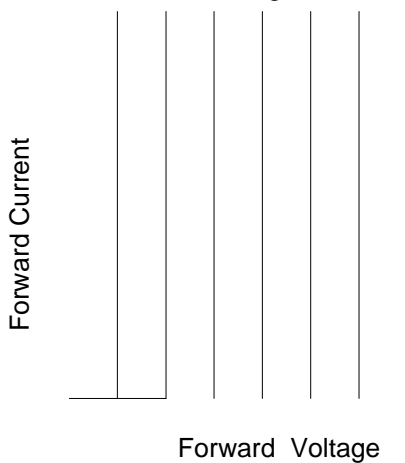


Fig.4 Relative Radiant Intensity Vs Ambient Temperature



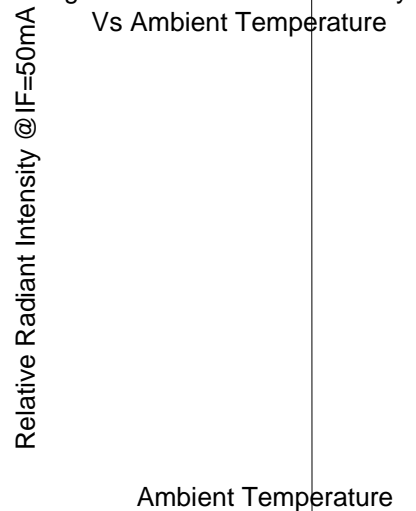


Fig.5 Relative Radiant Intensity Vs Forward Current




Fig.6 Radiation Diagram

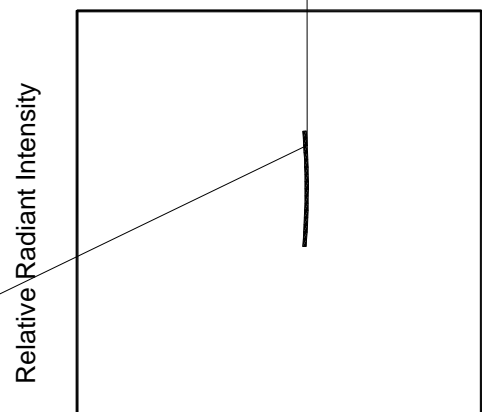

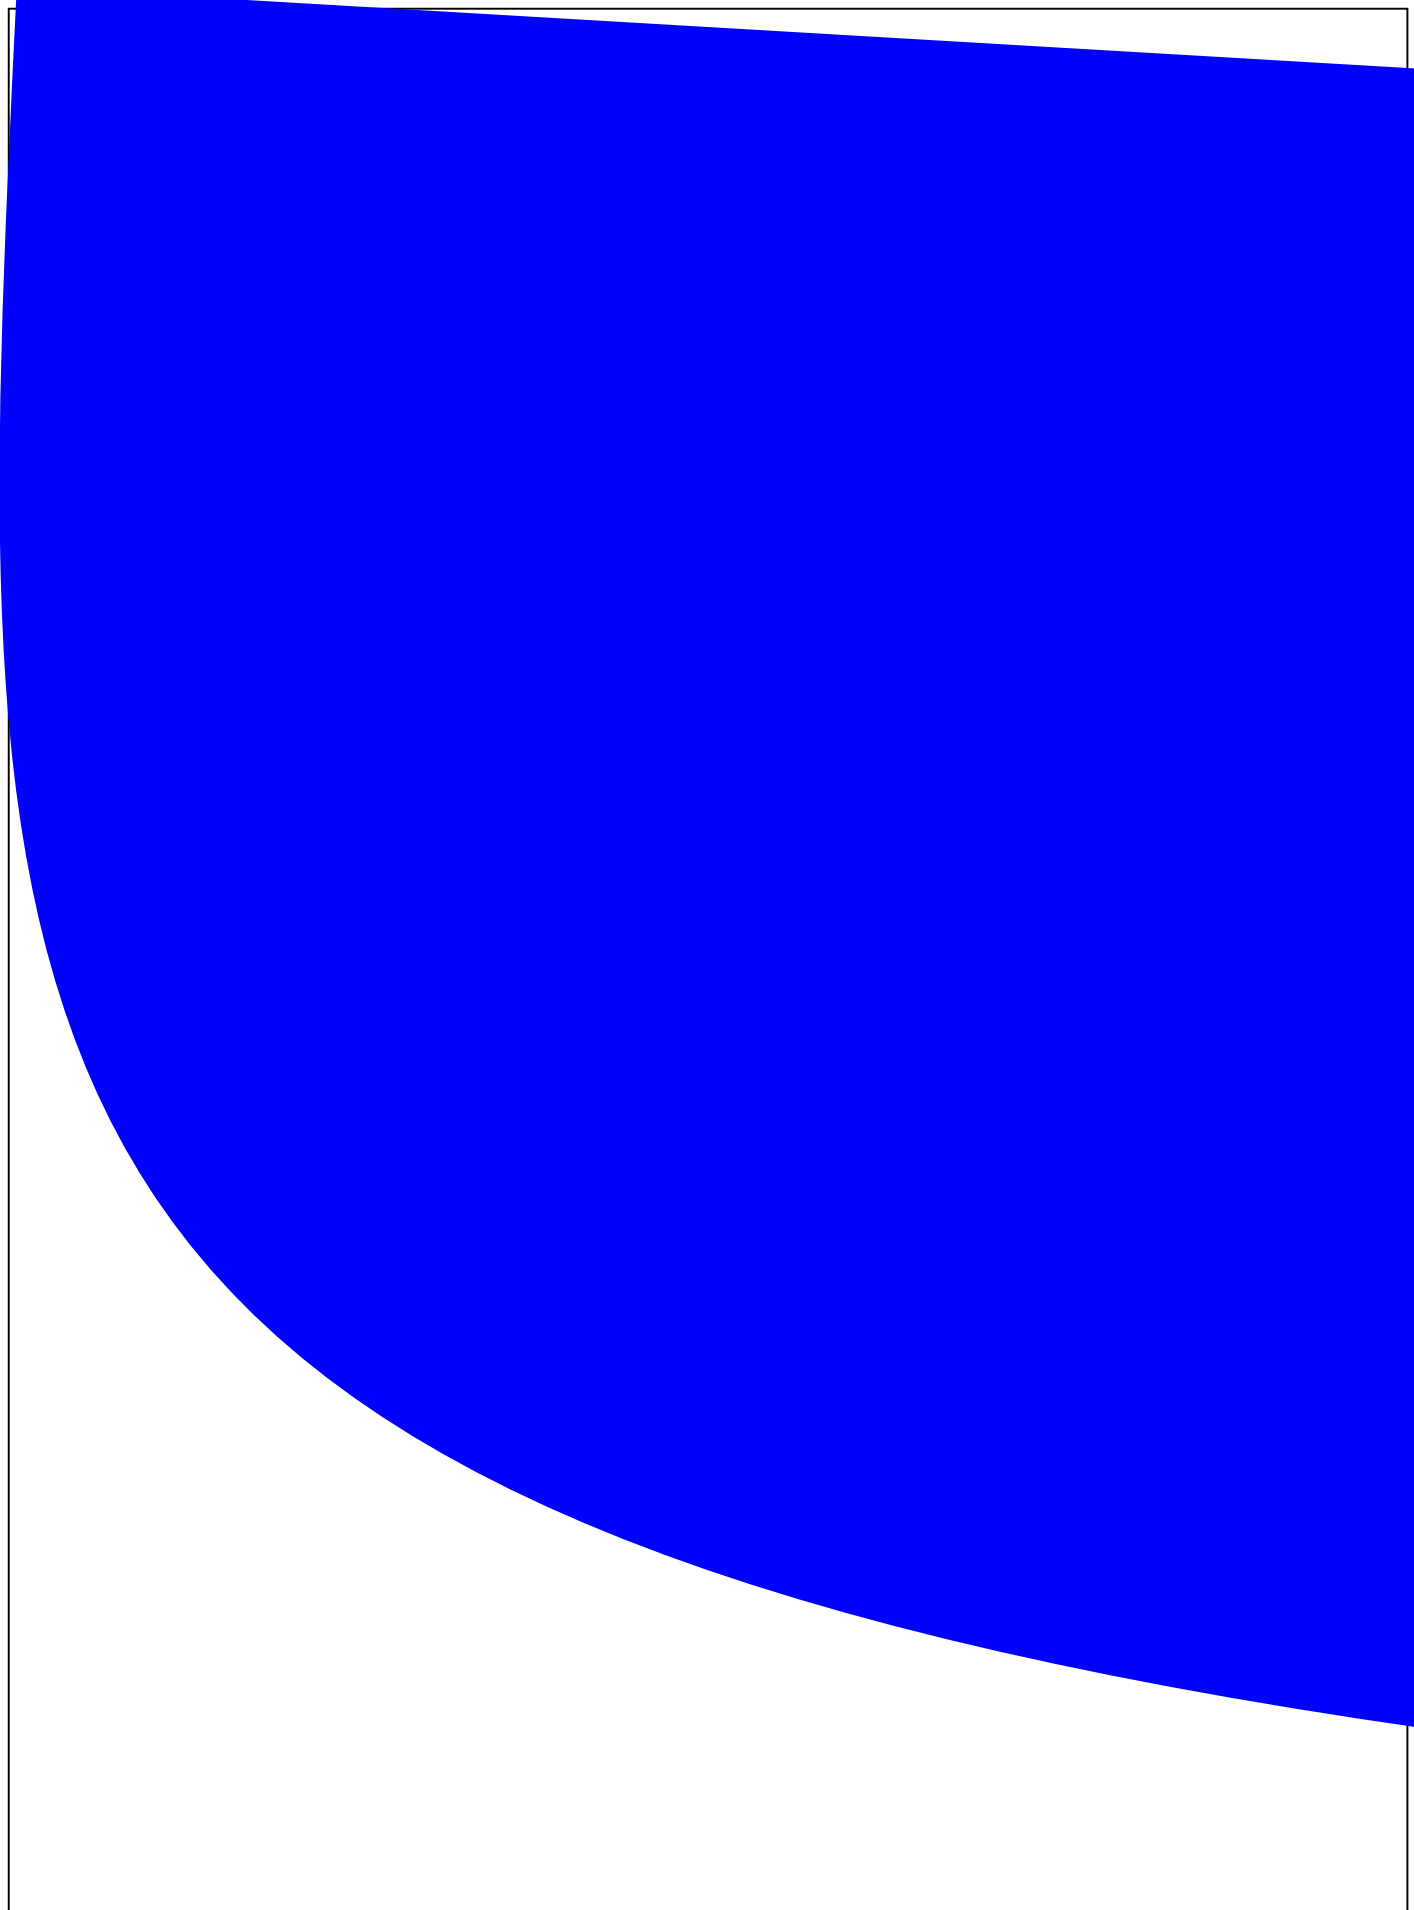

Ⓢ

LIGHT Universal Label

\$' i 9ϕfl +k6x3 ?L ϕ .	
/LJKW (OHFWURQLFV & 2	/7'
0 2' (/ 1\$.0(
4 8 \$ 1 7, 7<	
%, 1	
3 \$ & ., 1 * ' \$ 7 (
5 (0 \$ 5 . 6	

Ⓢ & Ⓢ q ⓈRⓈ ⓈOⓈ ⓈBⓈ Ⓢh Ⓢd Ⓢv' 1 Ⓢb Ⓢv' Ⓢacd Ⓢv' ⓈhⓈS Ⓢd Ⓢv' ⓈhⓈSU Ⓢv' 4 Ⓢd ⓈD %f \v 4 Ⓢd ⓈD %f IV 4 Ⓢt ⓈD %f Yid P

Customer Defined Label



Ÿ ÷ ` - f>B
f H
1 4Ÿ
>B U
Øm~ -




H 6vH


Ⓢ





ITEM	W	A0	B0	K0	E	F	D0	P	P0	P2	T
DIM	12.00	3.50	4.40	3.40	1.75	5.50	1.50	8.00	4.00	2.00	0.35
TOLE	+0.30 -0.30	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.15 -0.15	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.05 -0.05

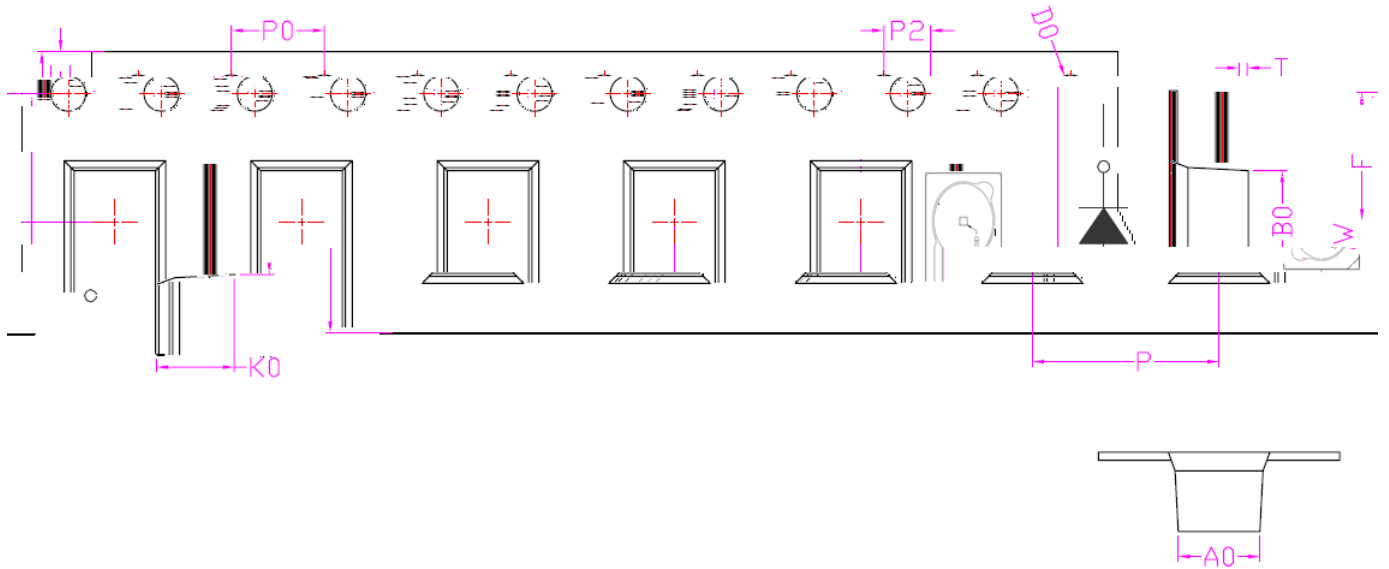



Note: Tolerance unless mentioned is ± 0.1 mm; Unit = mm



LIGHT universal Label




Aluminum moisture-proof bag

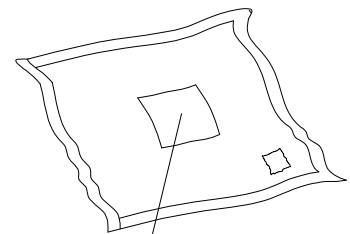

Customer defined Label or LIGHT universal Label

5.4.1

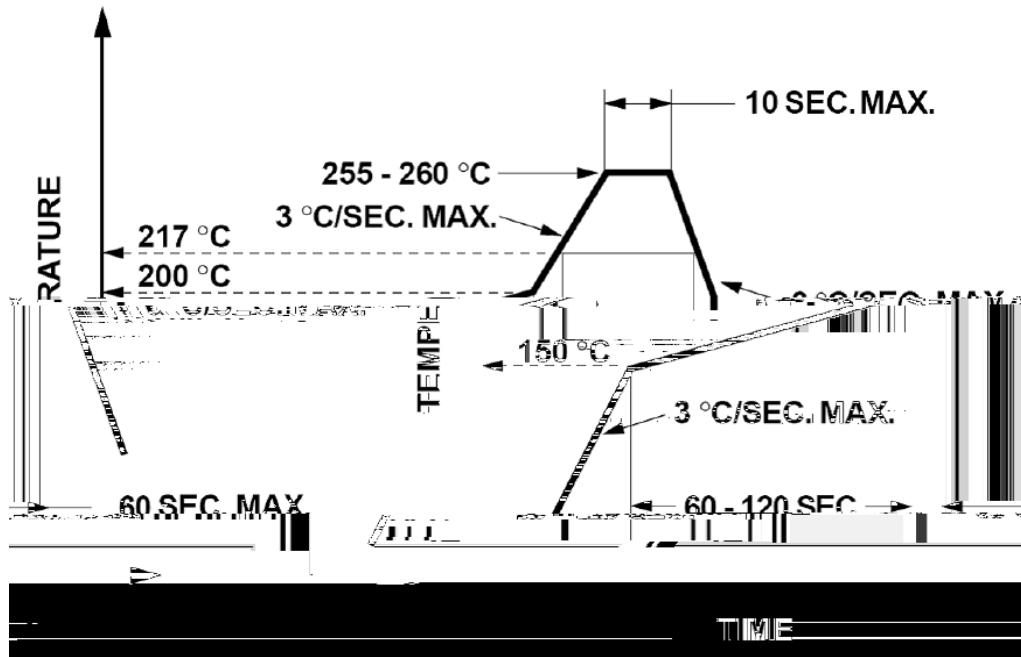

1. Reflow soldering should not be done more than two times.
2. When soldering, do not put stress on the LEDs during heating.

5.4.2

1. When hand soldering, the temperature of the iron must less than 300 for 3 seconds.