



Features

- i Pb free product—RoHS compliant
- i Low power consumption, High efficiency
- i Reliable and rugged
- i Long life – solid state reliability
- i Radiant angle: 70°

Package Dimension

Notes:

1. All dimensions are in millimeters.
2. Tolerance is ± 0.10 mm unless otherwise noted
3. Specifications are subject to change without notice.


Part No.	SL-T4234IRC150-L325-G	Page	2 of 9
----------	-----------------------	------	--------

Absolute Maximum Ratings at Ta=25W

Parameter	MAX.	Unit
Power Dissipation	150	mW
Continuous Forward Current	100	mA
Peak Forward Current ^{*3}	1.0	A
Reverse Voltage	5	V
Electrostatic Discharge (HBM ^{*5})	2000	V
Moisture Sensitivity Level ¹	5a	
Operating Temperature	-40 to + 85	
Storage Temperature	-40 to + 100	
IR Reflow Temperature ^{*4}	260 for 10 Seconds MAX.	

1. Storage^Ö

Typical Electrical / Optical Characteristics Curves
(25 W Ambient Temperature Unless Otherwise Noted)

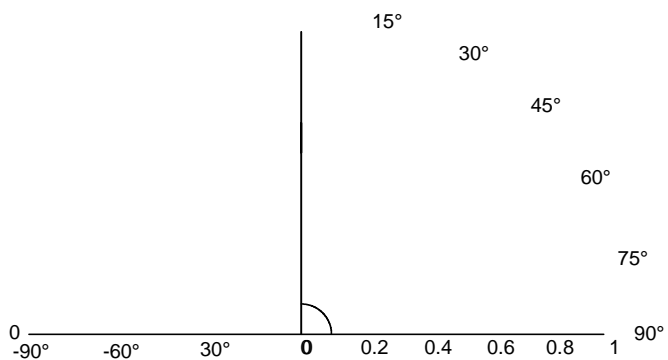





ons (Loaded Quantity: 2200pcs/reel)

